

MCCORMACK Industries



"The front end loader people"

FA Series Loader

Standard Features:

- Greaseable Pivot Points
- Mechanical Self Levelling
- Fitted with Diverter (*standard*) for third function
- Quality and Robust Construction
- 2 Bank Control Valve (*with cable operated Joystick*)
- Standard with Euro Quick Coupler
- Quick Attach & Detach from tractor
- Range of Attachments available




Compact design for agricultural and life-style applications



Wide range of attachments to suit available




Easily change between attachments with Euro coupler

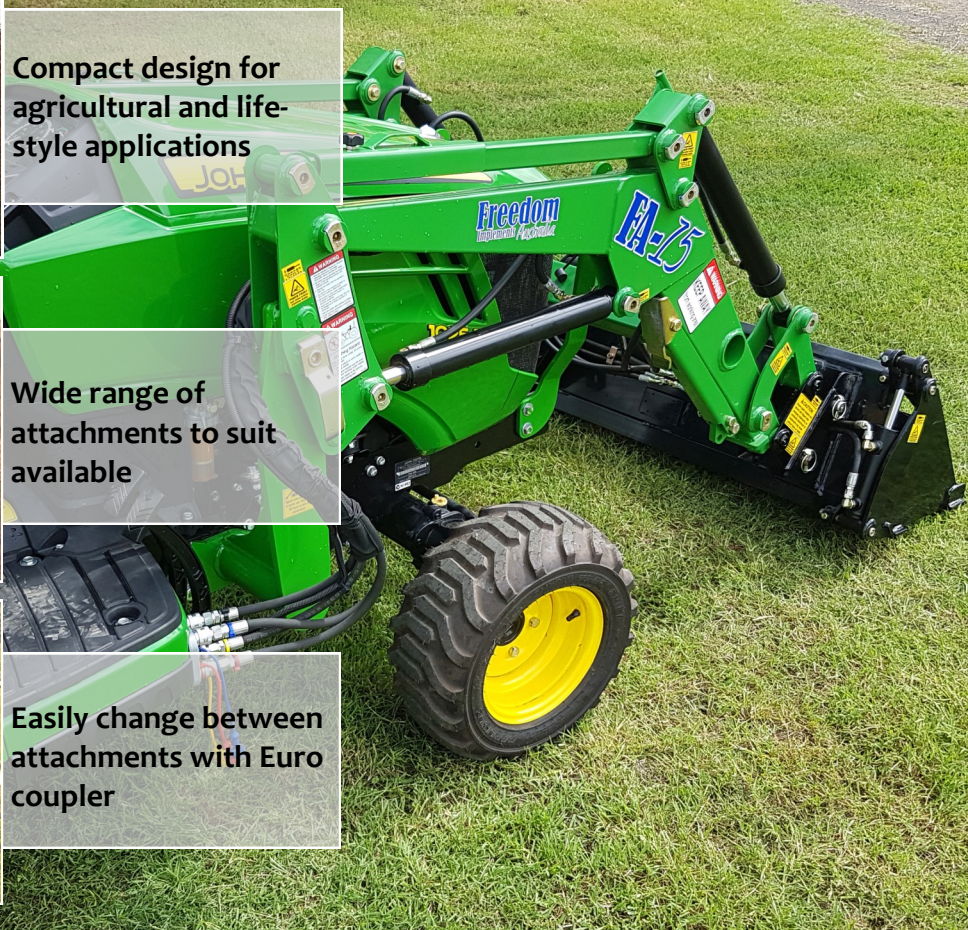



Technical Specs.

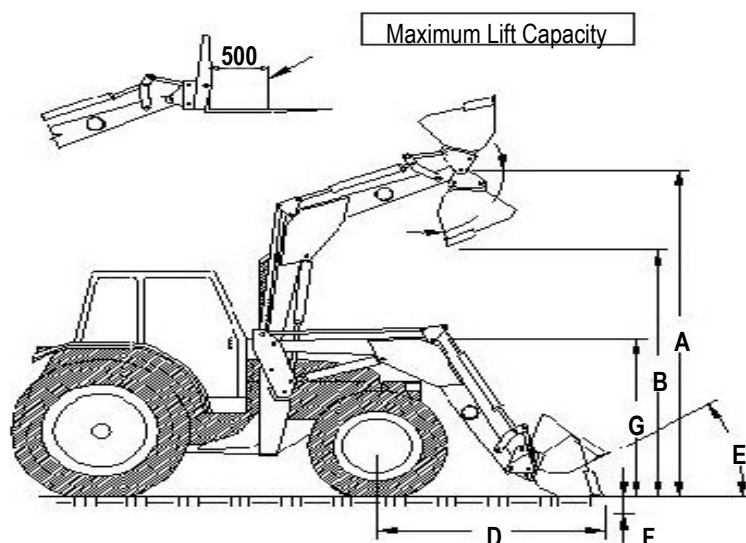

Loader Model	A Max Lift Height (mm)	B Clearance when Dumped (mm)	C Max Dump Angle (Deg)	D Reach at ground (mm)	E Crowd Back (Deg)	F Digging Depth (mm)	H Heaped Capacity (m³)	I Max lift Capacity (kg)	Bucket Width (mm)
15	1800	1250	50	1350	30	120	0.12	200	1200
35	2315	1730	57	1650	39	140	0.27	250	1400
45	2750	2150	63	1700	43	160	0.27	750	1600
55	2780	1970	76	1850	42	170	0.50	900	1800
77	3490	2540	52	2100	46	100	0.58	1000	2100



Distributed by:
McCormack Industries
Aubigny-Crosshill Road, Aubigny, Qld
Ph: (07) 46 915 288 | Fax: (07) 46 915 126
Email: sales@mcind.com.au
www.mcind.com.au

MCCORMACK
industries

"The front end loader people"